

aquaBUBBLER pre-installation guide

The following step by step guide will help you organise the installation of your aquaBUBBLER with water bottle re-fill station.

This will help you prepare for consultation with your plumber and eliminate any surprises!


A typical installation should take three to four hours, depending on location.

The aquaBUBBLER must be installed by a certified plumber; failure to do this will void all warranties.

Installation must be in accordance with AS/NZS 3500.


Where can I install an aquaBUBBLER?

Outdoor or indoors

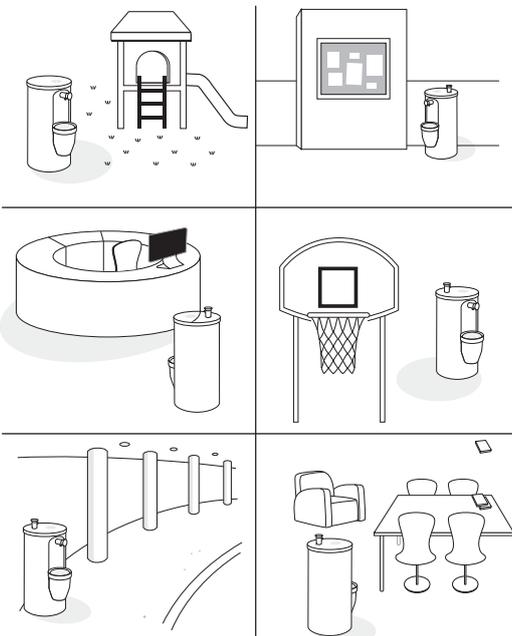


What can the aquaBUBBLER be installed onto?

Concrete pad or timber floor



aquabubblor plumbing options


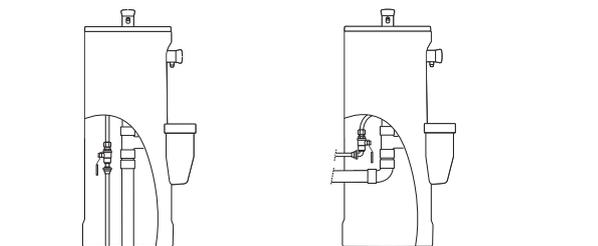


option 1. up through the center option 2. retro fit through the side

What location is best?


Access to water and drainage

Note: Blue depicts areas that are either water or drainage

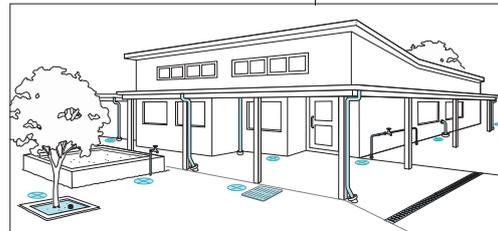

aquaBUBBLER lid orientation options


Depending on where you install the aquaBUBBLER, you can orientate the lid to best suit

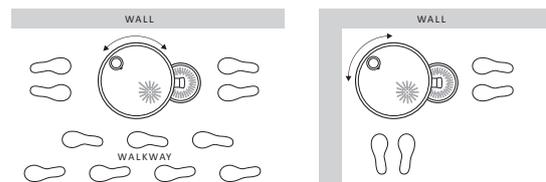

What materials / tools will the plumber need?

Depending on the install type, the following is required


1. Timber boxing foundation
2. Screws and washers
3. Bag of cement
4. 10 mm threaded rod and nuts
5. Flexible head ratchet wrench
6. 40 mm hole saw
7. 15 mm hole saw
8. 10 mm socket



aquaBUBBLER kit contents

Your aquaBUBBLER comes with the following...

1. Classic aquaBUBBLER
2. S-Trap, waste pipe
3. Security drill bit
4. 6mm alan key
5. Base mounting plate
6. Isolation valve







aquaBUBBLER

1300 213 774




www.aquabubbler.com.au

Using & caring for your aquaBUBBLER

We highly recommend regular cleaning, to ensure the aquaBUBBLER is hygienic and attractive to drink from.
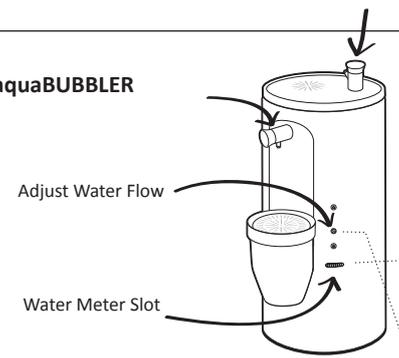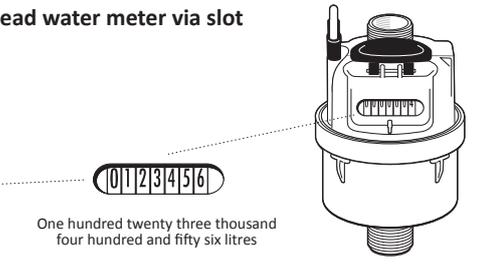
<p>Using your aquaBUBBLER</p> 	<p>Read water meter via slot</p>  <p>One hundred twenty three thousand four hundred and fifty six litres</p> <p><i>(The water meter is an optional extra.)</i></p>
<p>Adjusting water flow</p> <p>At times the water flow may fluctuate depending on your local water supply pressure. Re-adjusting is simple using a 6mm flat head screw driver.</p> 	<p>Ensure the water-bottle pod is full of water before using the aquaBUBBLER</p> 
<p>>>> IMPORTANT Water flow will need adjusting 1-2 days after installation</p>	

Trouble Shooting
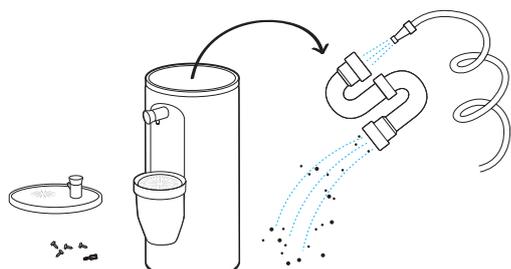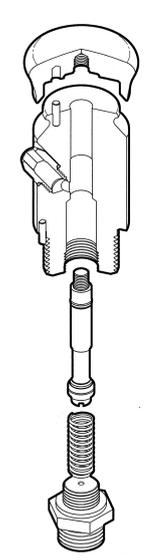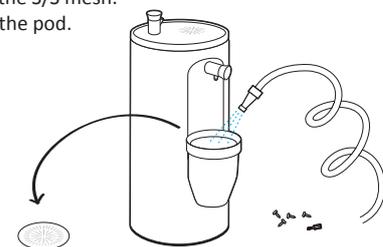
<p>What to do if the aquaBUBBLER becomes blocked?</p> <p>You will need to unblock the S-Trap. This means removing the stainless steel (S/S) dish. Use the security key provided unfasten the four security screws. Remove S/S dish. Remove the S-Trap and unblock it. Reattach the S-Trap. Reattach the S/S dish and re-fasten the security screws.</p> 	<p>What to do if the tap leaks?</p> <p>Remove the S/S dish. Turn off the isolation valve. Disconnect the flexi hose. Undo the hex connector at the base of the tap. Remove the spring. Use an 8mm flat head screw driver to remove the spindle. Wash spindle or replace broken o-ring. Don't forget to lube top o-ring. Re-assemble tap.</p> <p><i>(For better purchase, do not remove tap from S/S dish or from body of aquaBUBBLER.)</i></p> 
<p>What to do if the water bottle pod becomes blocked?</p> <p>Use the security key provided. Unfasten the security screws. Remove the S/S mesh. Unblock the pod.</p> 	 <p>PO Box 1737 Collingwood, VIC 3066 1300 213 774 www.aquabubbler.com.au</p>