

The following step by step guide will help you organise the installation of your UA 2 aquaBUBBLER with water bottle re-fill station.


This will help you prepare for consultation with your plumber and eliminate any surprises!

A typical installation should take three to four hours, depending on location.

The UA 2 aquaBUBBLER must be installed by a certified plumber; failure to do this will void all warranties.


Where can I install an UA 2 aquaBUBBLER?

Indoor and Outdoor

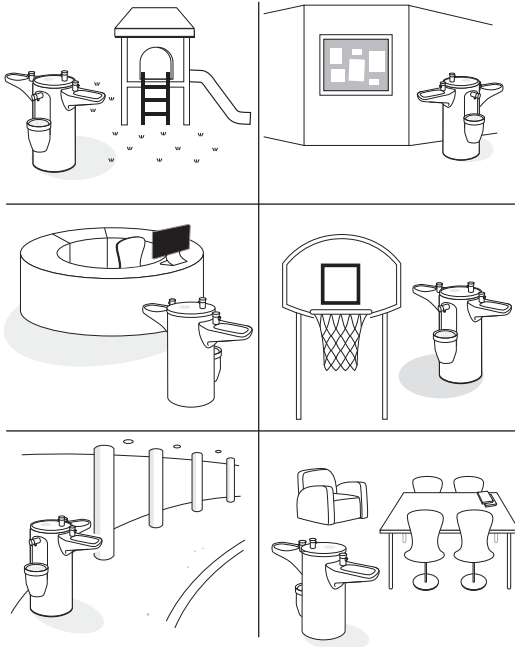


What can the UA 2 aquaBUBBLER be installed onto?

Concrete pad or timber floor

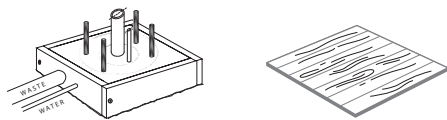

UA 2 aquabubbler plumbing options

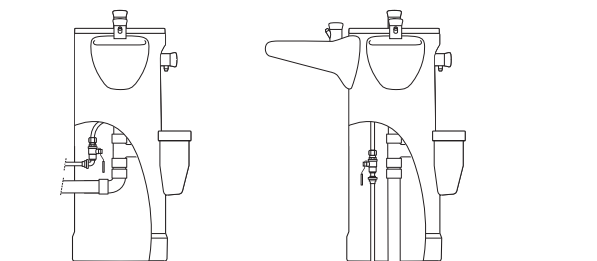


1 retro fit through the side

2 up through the center

What location is best?


Access to water and drainage

Note: Blue depicts areas that are either water or drainage

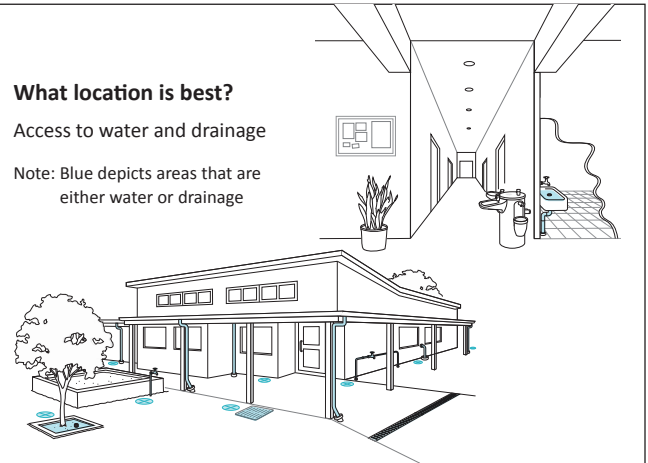


UA 2 aquaBUBBLER lid orientation options

Depending on where you install the UA aquaBUBBLER, you can orientate the lid to best suit

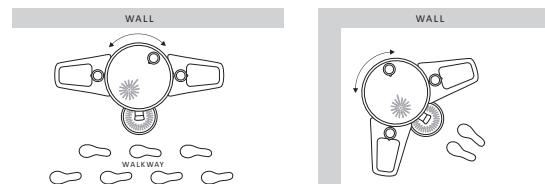


What materials/tools will the plumber need?

Depending on the install type, the following is required

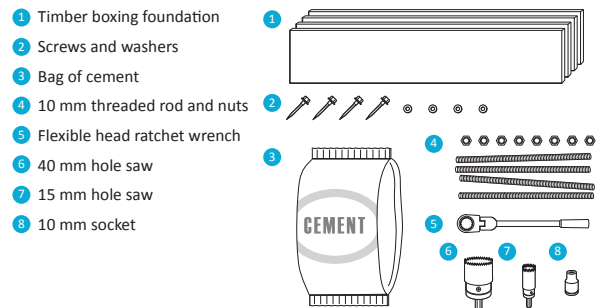


UA aquaBUBBLER kit contents

Your UA aquaBUBBLER comes with the following...

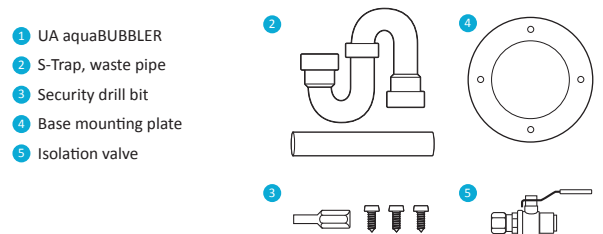





How to attach the UA protrusion?

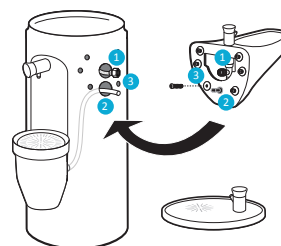




- 1 Connect the Flexi hose to the compressed elbow
- 2 Connect the waste pipe to black director
- 3 Screw the wheelchair pod to the body using a 5mm allen key

Using & Caring for Your Universal 2 aquaBUBBLER

We highly recommend regular cleaning, to ensure your UA 2 aquaBUBBLER is hygienic and attractive to drink from.
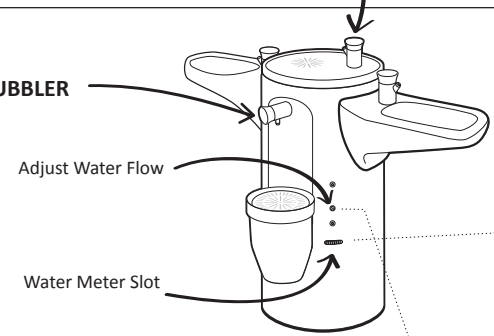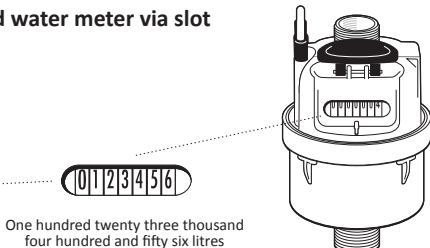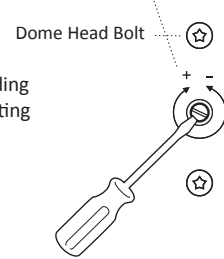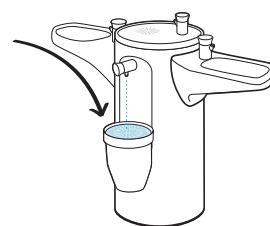
<p>Using your UA 2 aquaBUBBLER</p> 	<p>Read water meter via slot</p>  <p>One hundred twenty three thousand four hundred and fifty six litres</p> <p><i>(The water meter is an optional extra.)</i></p>
<p>Adjusting water flow</p> <p>At times the water flow may fluctuate depending on your local water supply pressure. Re-adjusting is simple using a 6mm flat head screw driver.</p> 	<p>Ensure the water-bottle pod is full of water before using the UA 2 aquaBUBBLER</p> 
<p>>>> IMPORTANT Water flow will need adjusting 1-2 days after installation</p>	

Trouble Shooting
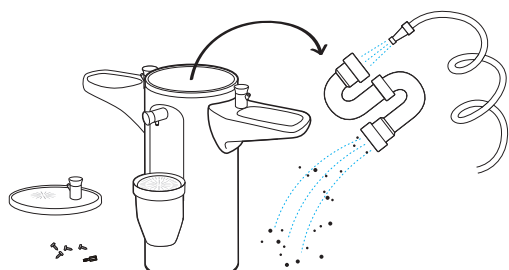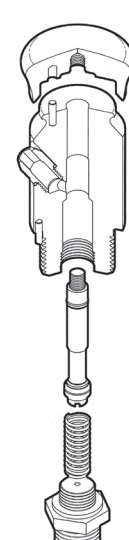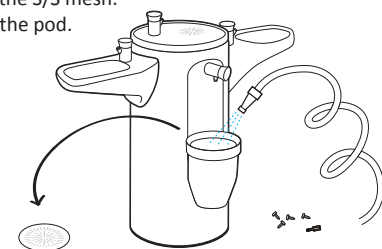
<p>What to do if the UA 2 aquaBUBBLER becomes blocked?</p> <p>You will need to unblock the S-Trap. This means removing the stainless steel (S/S) dish. Use the security key provided unfasten the four security screws. Remove S/S dish. Remove the S-Trap and unblock it. Reattach the S-Trap. Reattach the S/S dish and re-fasten the security screws.</p> 	<p>What to do if the tap leaks?</p> <p>Remove the S/S dish. Turn off the isolation valve. Disconnect the flexi hose. Undo the hex connector at the base of the tap. Remove the spring. Use an 8mm flat head screw driver to remove the spindle. Wash spindle or replace broken o-ring. Don't forget to lube top o-ring. Re-assemble tap.</p> <p><i>(For better purchase, do not remove tap from S/S dish or from body of aquaBUBBLER.)</i></p> 
<p>What to do if the water bottle pod becomes blocked?</p> <p>Use the security key provided. Unfasten the security screws. Remove the S/S mesh. Unblock the pod.</p> 	<div style="text-align: right;"> <p>1300 213 774 www.aquabubbler.com.au</p> <p>0800 213 774 www.aquabubbler.co.nz</p> </div> 